


PUTPAD INTUMESCENT & ACOUSTIC PUTTY PADS

Quelfire Intumescent & Acoustic Putty Pads are designed to maintain the fire resistance of plasterboard partitions where they have been penetrated by plastic or metal electric socket boxes. They also make a significant contribution to the reduction of air leakage in properties, helping reduce energy costs and carbon emissions.



Single Socket Quelfire Intumescent & Acoustic Putty Pad

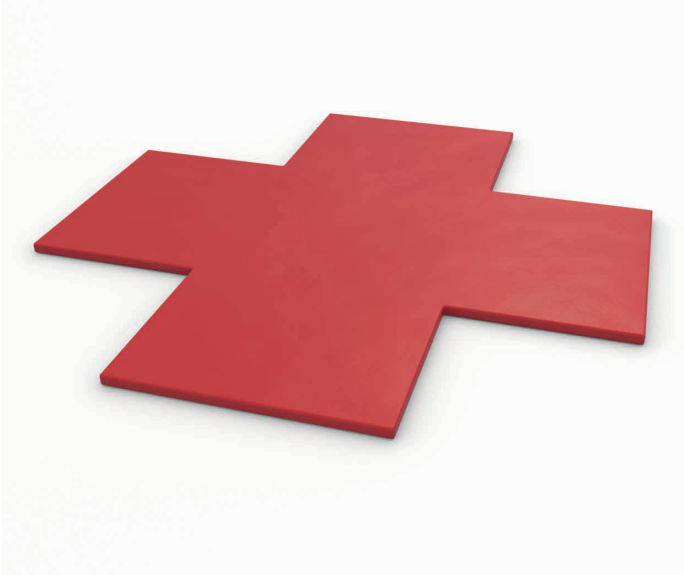

Double Socket Quelfire Intumescent & Acoustic Putty Pad installed

FEATURES & BENEFITS

- 🔍 Tested to the principles of BS EN 1366-3:2009 and assessed to BS EN 1363-1:2012
- 🔍 Up to 2 hour fire rating
- 🔍 Acoustic Tested to BS EN ISO 140-3:1995
- 🔍 Up to 70dB reduction
- 🔍 Easily installed by hand
- 🔍 Provides a cold smoke seal
- 🔍 Suitable for plastic electric socket boxes
- 🔍 Suitable for metal electric socket boxes
- 🔍 Tested specifically to suit common challenges
- 🔍 Tested on Multimedia socket plate
- 🔍 Can be easily retrofitted

APPLICATION / INSTALLATION

Quelfire Intumescent Acoustic Putty Pads are suitable for use in both metal and plastic electric socket boxes and to suit both single and double electric socket boxes.

They can be fitted during installation of the socket boxes or as a retrofit solution. Installation is simple and requires no special tools or skills and a installation guide is available.

The simple process is: Remove the cover plate, ensure the box is dust free, remove the backing paper and mould the putty pad into the socket box ensuring the socket box is completely covered right out to the front face of the wall, trimming off any excess if required. A slit can be cut with a knife where any wires penetrate and the putty can then be resealed around the wire once fitted.

The Quelfire Intumescent Putty Pad has been additionally fire tested to cover situations that arise on site such as socket boxes set back into the wall, over-sized holes and media plates, full details are available on request from the Quelfire Technical team.

COMPOSITION

Quelfire Intumescent & Acoustic Putty Pads are manufactured from a mouldable, red, non-setting silicone based intumescent polymer.



The Warringtonfire Logo displayed is the trademark of Warringtonfire registered in the United Kingdom. The Warringtonfire Logo is evidence that the products denoted as 'Tested by Warringtonfire' were tested to BSEN 1366-3: 2009 in England between September 22nd 2015 and January 7th 2021.

ACOUSTIC PERFORMANCE

The Quelfire Intumescent Acoustic Putty Pad will help with reducing the room-to-room noise transfer through socket penetrations and have been acoustic tested to BS EN ISO 140-3:1995 achieving up to 70dB reduction in standard socket configurations.


FIRE PERFORMANCE

When subjected to fire, the Quelfire Intumescent Acoustic Putty Pad reacts forming a robust fire resistant char to prevent the passage of fire through the socket box and cable penetrations.


They can be installed to sockets that are both offset or back-to-back in both plastic and metal socket boxes:

TABLE OF RESULTS IN PLASTIC BOXES

Socket size	Back-to-Back or Off-Set	Wall thickness	Socket box	Integrity (minutes)	Insulation (minutes)
Single	Off-Set	100mm	Plastic	120	120
Single	Back-to-Back	100mm	Plastic	90	90
Double	Off-Set	100mm	Plastic	120	120
Double	Back-to-Back	100mm	Plastic	30	30

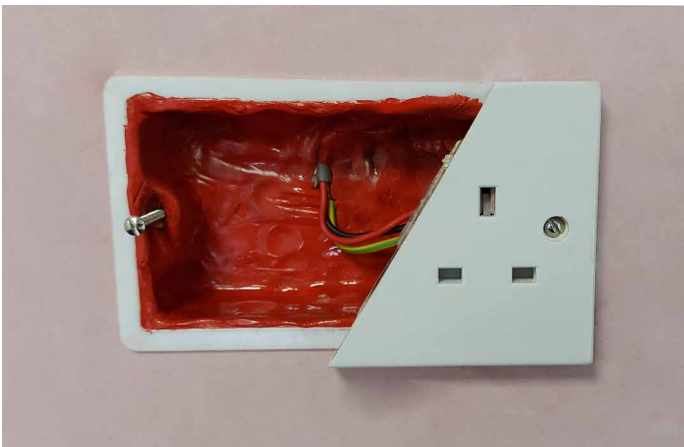

Actual installation of a Quelfire Putty Pad
Installed Flush with the Front Face of the Plastic Socket Box

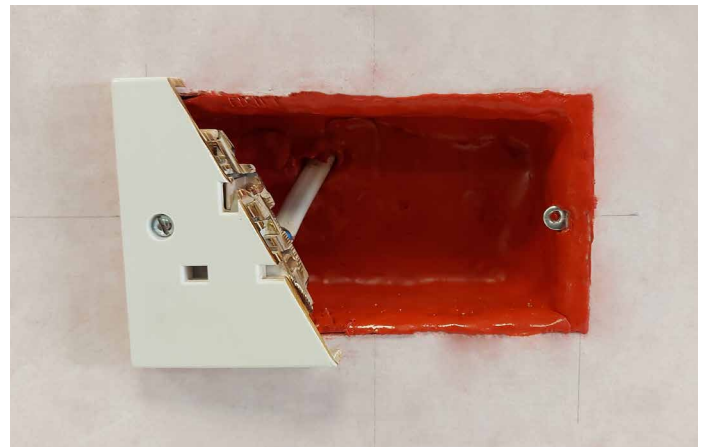


Actual installation of a Quelfire Putty Pad
Installed Flush with the Front Face of the Metal Socket Box


TABLE OF RESULTS IN METAL BOXES

Socket size	Back-to-Back or Off-Set	Wall thickness	Socket box	Integrity (minutes)	Insulation (minutes)
Single	Off-Set	120mm	Metal	90	90
Single	Back-to-Back	120mm	Metal	90	90
Double	Off-Set	120mm	Metal	90	90
Double	Back-to-Back	120mm	Metal	90	90
Media Plate*	Off-Set	120mm	Metal	120	60

*Quelfire Intumescent Putty Pads have been tested with a Deta S1988 Multimedia switched socket with 4 x 13A + TV + Phone Socket with dimensions 252mm high x 192mm wide x 40mm deep. There are other media plates on the market and Quelfire are unable to comment on the performance on anything other than what is tested, where deviations from tested solutions are intended we recommend a qualified fire engineer is consulted before the work commences.

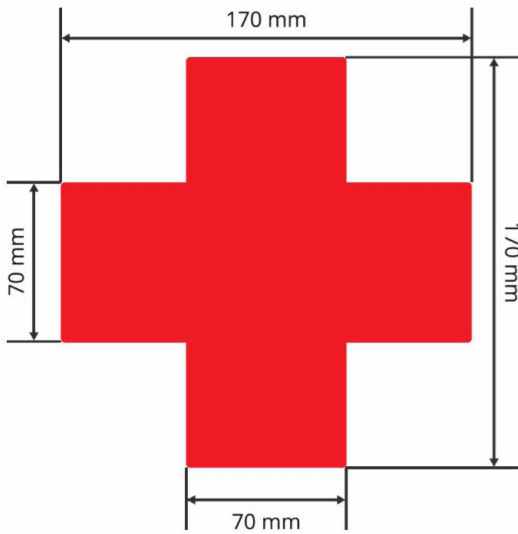

Single Socket Quelfire Intumescent & Acoustic Putty Pad - dimensions

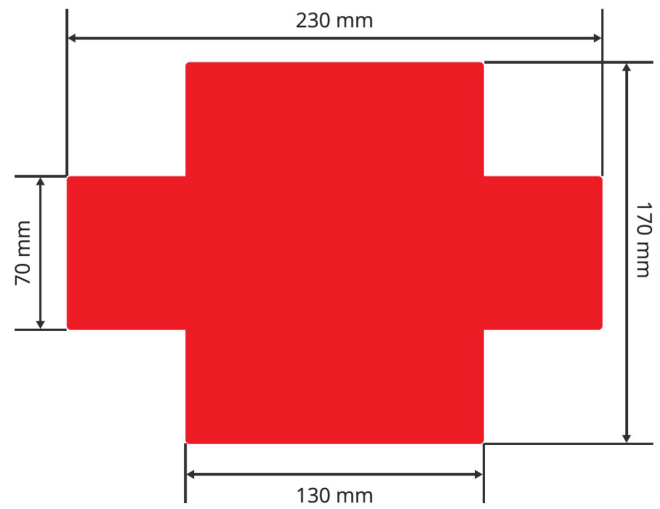

Double Socket Quelfire Intumescent & Acoustic Putty Pad - dimensions

Technical Support & Guidance:

Should you require any further information regarding this product, please do not hesitate to contact the technical department at Quelfire Ltd.

Tel: **0161 928 7308**. Email: technical@quelfire.co.uk

Please be aware that this document is intended for general information only and all details should be checked against all relevant supporting test evidence, certification and installation guidelines.

Use of alternative components or deviations from the instructions in any way is likely to mean that the installation will not comply with the assessed rating.

Quelfire Ltd does not accept responsibility for the consequences of using Quelfire products in applications or for purposes not authorised by Quelfire Ltd. Expert advice should be sought where such applications are contemplated.

The policy of Quelfire Ltd is one of constant improvement. Details are subject to change and/or withdrawal without notification therefore you must ensure this is the latest published documentation. Whilst Quelfire will endeavour to keep its publications up to date, the accuracy of the information contained within this document may be affected by pertinent changes in the law or regulatory requirements and alterations or amendments to the specification of Quelfire products.

All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Quelfire Ltd has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given. Full terms and conditions can be accessed at: <https://quelfire.co.uk/terms-conditions-of-sale/>